



KEY FEATURES

- Plastic Housing
- Up to 2592x1944@25fps
- S+265/H.265/H.264
- Min. illumination Color: 0.02Lux@F2.0
- Smart IR, IR Range: 30m
- Audio I/O 1/1, Alarm I/O 1/1
- Support Tripwire, Perimeter, Double Tripwire
- Support Heatmap
- Built-in Mic, SD Card Slot
- Operating Conditions -10°~50°, 0~95% RH
- POE



5MP Fisheye Camera

AFV-PF5AM-W

Pro Series

SPECIFICATIONS

Camera	
Image Sensor	1/2.7"
Signal System	PAL/NTSC
Min. Illumination	Color:0.002Lux@(F1.6, AGC ON),B/W:0Lux with IR
Shutter Time	1s to 1/100,000s
Day & Night	Dual IR Cut Filter with Auto Switch
WDR	120dB

Lens	
Lens Type	Fixed
Focal Length	1.4mm
Lens Mount	M12
Aperture Range	F2.0
Field of View	Horizontal field of view: 180°; Vertical field of view: 180°;



Illuminator	
IR LEDs	3
IR Distance	Up to 30m
Wavelength	850nm
White LEDs	N/A

Network	
ANR	Yes
Protocols	HTTP,HTTPS,TCP/IP,UDP,UPnP,ICMP,IGMP,SNMP,DHCP,DNS,DDNS,Easy DDNS,NTP,SSL,802.1X,QoS,IPv4,IPv6,PPPOE,SSH,Unicast,Multicast,RTCP,ARP
System Compatibility	onvif Profile S/T/G/CGI; MILSTONE, RTMP
Remote Connection	2
Client	Easy7,EasyLive Plus
Web	IE,Firefox,Edge,Safari,Chrome

Interface	
Communication Interface	1 RJ45 10M/ 100M self adaptive Ethernet port
Audio I/O	1/1
Alarm I/O	1/1
Built-in Mic	Yes
Built-In Speaker	N/A
Reset Button	Yes
On-board storage	Built-in MicroSD card slot, up to 512GB

Compression Standard	
Video Compression	S+ 265/H.264B/H.264M/H.264H/Motion JPEG
Video Bit Rate	32kbps~16Mbps
Audio Compression	G.711A/G.711U/ADPCM_D/AAC_LC
Audio Sampling Rate	8kHz/32kHz/48kHz

Feature	
Alarm Trigger	Voltage Alarm,Disk Full, Disk R/W Error,IP Address Conflict,MAC Address Conflict,FTP Server Exception ,Event Input, Event Output,Motion Detection,Mask Alarm
Video Analytics	Tripwire,Double Tripwire, Perimeter,Heatmap

General	
Web Client Language	18 languages English, Russian,Spanish, Korean, Italian,Turkish, Simple Chinese,Traditional Chinese,Thai,French, Polish,Dutch,Hebrew, Arabic,Vietnamese, German,Ukrainian, Portuguese
Operating Conditions	-10C~50C,0~95%RH
Power Supply	POE(802.3af)
Power Consumption	≤11W
Protection	N/A
Heater	N/A
Boundary Dimensions	122mmx122mmx37.5mm
Package Dimensions	138mmx138mmx110mm
GrossWeight	0.42kg
NetWeight	0.26kg




Image	
Max. Resolution	2592x1944
Main Stream	30fps(2592x1944, 2560x1440,1920x1080, 1280x720) N/A
Sub Stream	Max 30fps(704x576, 640x360,704x288, 352x288) N/A
Third Stream	Max 30fps(1920x1080, 1280x720) N/A
Image Setting	Saturation,brightness, contrast,sharpness, adjustableby client software or web browser
Image Enhancement	BLC/3D DNR/HLC/AGC
ROI	Yes,8 regions
OSD	16*16/32*32/48*48/64*64/ 96*96,adaptable size,Letters Such as Week,Date,Time, Total 5 Regions
Picture Overlay	1
Privacy Mask	Yes,4 regions
Defog	Yes

* Listed resolutions are only selectable options. It does not mean that all streams can work at their maximum resolution at the same time.



AVAILABLE MODEL
AFV-PF5AM-W

DIMENSIONS (Unit: mm)

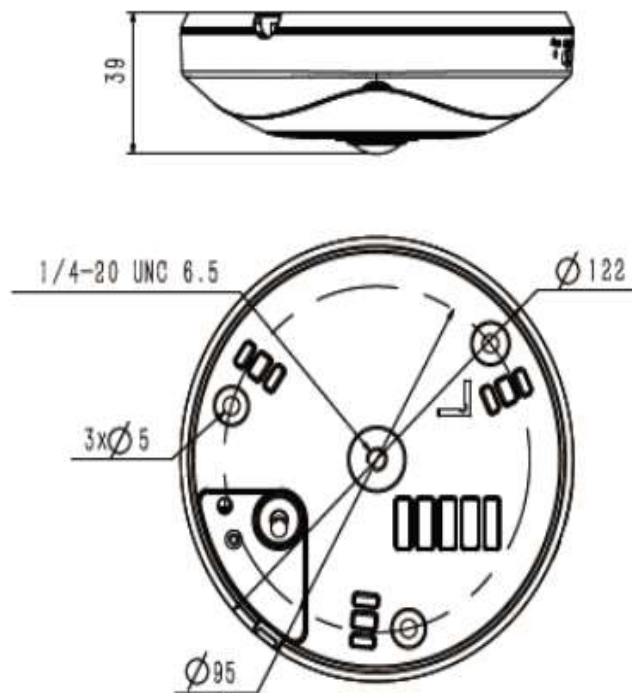

DISTRIBUTED BY



AFRA

Email: sales@afractiontech.com
Website: www.afractiontech.com

Tel: +971 55 39 73 643
+971 4 235 2333