



## KEY FEATURES

- Full Metal Housing
- Up to 2880x1620@30fps
- S+265/H.265/H.264
- Min. illumination Color: 0.002Lux@F1.6
- Smart IR, IR Range: 30m
- Support tripwire,perimeter
- Support Human/Vehicle Classification
- Built-in Mic, SD Card Solt
- Operating Conditions -40°~65°, 0~95% RH
- DC12V,POE
- IP66



## 5MP Fixed EW Camera

AFV-PT5ASM-FC

Pro Series

## SPECIFICATIONS

Camera	
Image Sensor	1/2.8"
Signal System	PAL/NTSC
Min. Illumination	Color:0.002Lux@(F1.6, AGC ON),B/W:0Lux with IR
Shutter Time	1s to 1/100,000s
Day & Night	Dual IR Cut Filter with Auto Switch
WDR	120dB
Angle Adjustment	0~340°,0~75°,0~360°

Lens	
Lens Type	Fixed
Focal Length	2.8mm
Lens Mount	M12
Aperture Range	F1.6
Field of View	Horizontal field of view: 104.2°; Vertical field of view: 58.8°; Diagonal field of view: 116.8°



### Illuminator

IR LEDs	2
IR Distance	Up to 30m
Wavelength	850nm
White LEDs	N/A

### Network

ANR	Yes
Protocols	HTTP,HTTPS,TCP/IP,UDP,UPnP,ICMP,IGMP,SNMP,DHCP,DNS,DDNS,Easy DDNS,NTP,SSL,802.1X,QoS,IPv4,IPv6,PPPOE,SSH,Unicast,Multicast,RTCP,ARP
System Compatibility	onvif Profile S/T/G,CGI,MILSTONE,RTMP
Remote Connection	2
Client	Easy7,EasyLive Plus
Web	IE,Firefox,Edge,Safari,Chrome

### Interface

Communication Interface	1 RJ45 10M/ 100M self adaptive Ethernet port
Audio I/O	1/1
Alarm I/O	1/1
Built-in Mic	Yes
Built-In Speaker	Yes
Reset Button	N/A
On-board storage	Built-in MicroSD card slot, up to 512 GB

### Compression Standard

Video Compression	S+ 265/H.264B/H.264M/H.264H/Motion JPEG
Video Bit Rate	32kbps~16Mbps
Audio Compression	G.711A/G.711U/ADPCM_D/AAC_LC
Audio Sampling Rate	8kHz/32kHz/48kHz

### Feature

Alarm Trigger	Voltage Alarm,Disk Full, Disk R/W Error,IP Address Conflict,MAC Address Conflict,FTP Server Exception ,Event Input, Event Output,Motion Detection,Mask Alarm
Video Analytics	Human/Vehicle Classification,Tripwire, Perimeter

### General

Web Client Language	18 languages English, Russian,Spanish, Korean, Italian,Turkish, Simple Chinese,Traditional Chinese,Thai,French, Polish,Dutch,Hebrew, Arabic,Vietnamese, German,Ukrainian, Portuguese
Operating Conditions	-40C~65C,0~95%RH
Power Supply	DC 12V, POE(802.3af)
Power Consumption	≤7W
Protection	IP66
Heater	N/A
Boundary Dimensions	117mmx117mmx84mm
Package Dimensions	138mmx138mmx110mm
GrossWeight	0.7kg
NetWeight	0.5kg




Image	
Max. Resolution	2880x1620
Main Stream	PAL:25fps(2880x1620, 2688x1520,2560x1440, 2304x1296)  50fps(1920x1080,1280x720)  NTSC:30fps(2880x1620, 2688x1520,2560x1440, 2304x1296)  60fps(1920x1080,1280x720)
Sub Stream	PAL:25fps(704x576,704x288, 352x288,640x360)  NTSC:30fps(704x480,704x240, 352x240,640x360)
Third Stream	PAL:25fps(1280x720,704x576, 640x360,704x288,352x288)  NTSC:30fps(1280x720, 704x480,640x360,704x240, 352x240)
Image Setting	Saturation,brightness, contrast,sharpness, adjustable by client software or web browser
Image Enhancement	BLC/3D DNR/HLC/AGC
ROI	Yes,8 regions
OSD	16*16/32*32/48*48/64*64/ 96*96,adaptable size,Letters Such as Week,Date,Time, Total 5 Regions
Picture Overlay	Yes
Privacy Mask	Yes,4 regions
Defog	Yes

\* Listed resolutions are only selectable options. It does not mean that all streams can work at their maximum resolution at the same time.



**AVAILABLE MODEL  
AFV-PT5ASM-FC**

**DIMENSIONS (Unit: mm)**

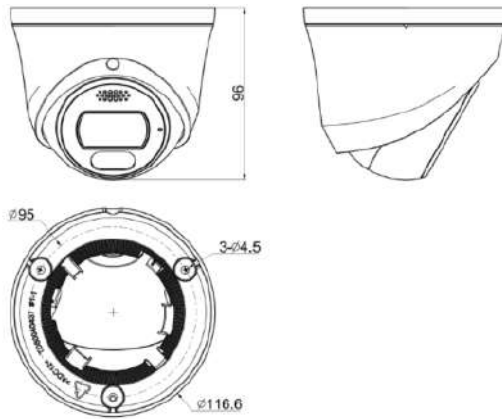

**ACCESSORIES**



**TC-P54BM SPEC:V5**



**A28 WALL MOUNT**

DISTRIBUTED BY



**AFRA**

Email: [sales@afractiontech.com](mailto:sales@afractiontech.com)  
Website: [www.afractiontech.com](http://www.afractiontech.com)

Tel: +971 55 39 73 643  
+971 4 235 2333